


Wall Mounted Split Units

Climatcool U.S.A.
Hi-Tech Airconditioning

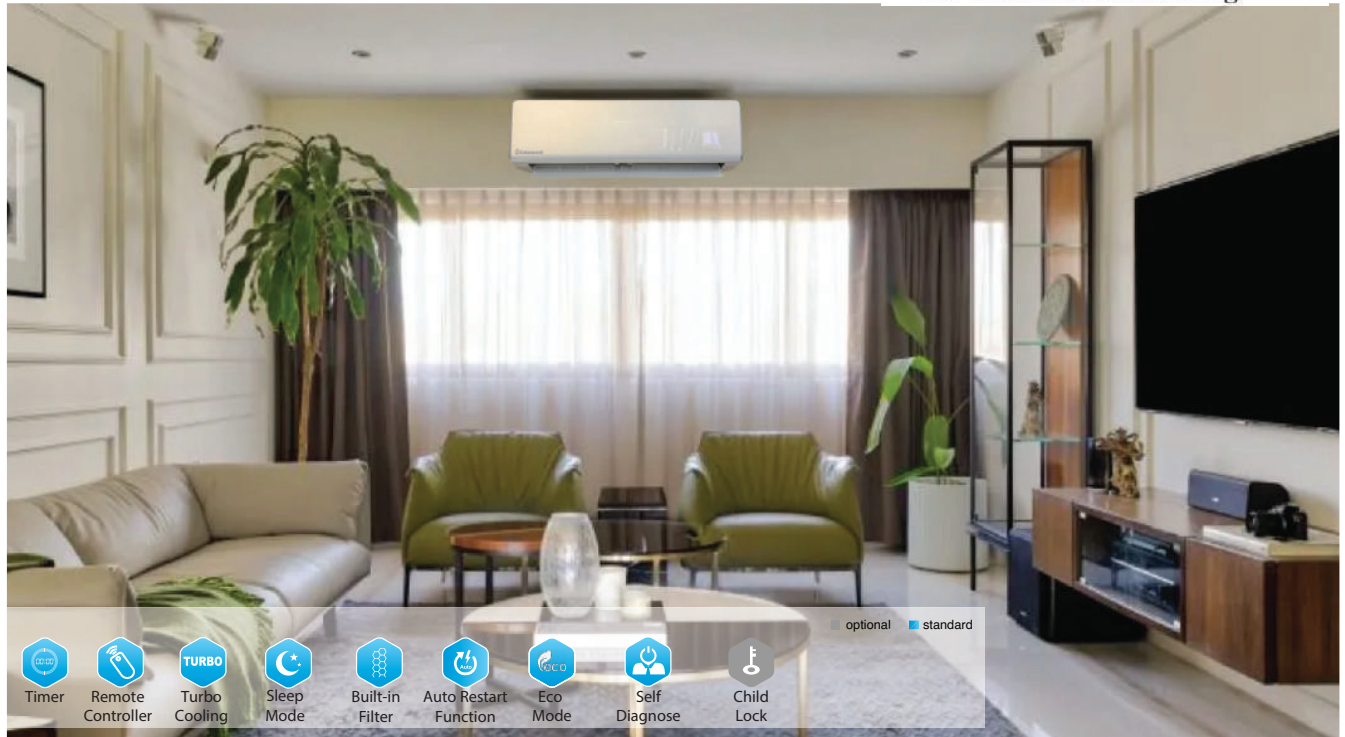

Indoor Decorative Unit

Fast Cooling >>

- ▶ The AC is operate in high-frequency when turning on which allow to reach the setting temperature quickly and achieve fast cooling at 30 seconds.




Two-way Draining Connection >>

- ▶ Both left and right of the indoor unit are possible for outstretch of connection piping and drainage hose, which enables easy installation.



More Options >>

- ▶ Multi-color decorative strips and panels for selection.
- ▶ Silver, Gold and Transparent design.




Wall Mounted Split Units

Outdoor Side Discharge


High-Quality Compressor >>

- Provides more stable power for reliable operation by adopting international famous brand high-quality compressors.

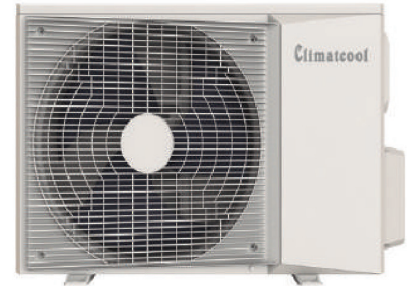

Internal thread copper pipe >>

- High quality internal thread copper pipe together with advance manufacturing technology makes the product more details durable and stable with hydrophilic aluminum foil.



Wide Operation Temp. Range >>

- With wide operating temperature range, the air conditioner can also run at extreme weather.



Specification



T3, High Efficiency, R-410a

Unit Model	Indoor Outdoor	SCW-18CRN1-21		SCW-24CRN1-21	
		SCC-18CN1-21		SCC-24CN1-21	
Power Supply	V,HZ,Ph	220-240V/ 50Hz/ 1Ph			
Cooling	Capacity (T1/T3)	Btu/h	17500 / 14500	22900 / 19700	
		Kw	5.13 / 4.25	6.71 / 5.77	
	Power Input (T1/T3)	Kw	1.48 / 1.74	1.94 / 2.37	
	Current (T1/T3)	A	11.81 / 8.31	11.8 / 8.31	
	EER (T1/T3)	(Btu/h)/W	11.8 / 8.32	11.8 / 8.7	
Indoor Unit	Controller	Type	Remote Controller		
	Air Flow (H/M/L)	m ³ /h	1060/60/890	1080/950/870	
	Noise Level (H/M/L)	dB(A)	47/42/39	46/44/41	
	Net Dimension (WxHxD)	mm±5	972x215x320	1080x226x335	
	Packing Dimension	mm±5	1070x310x410	1175x330x415	
	Weight (Net/ Gross)	Kg	13.5/16	14.5/18.2	
Outdoor Unit	Compressor	Type	Rotary		
	Refrigerant/ Flow Control	Type	R-410a / Outdoor Capillary Tube		
	Net Dimension (WxHxD)	mm±5	790x520x280	848x670x345	
	Packing Dimension	mm±5	920x600x380	975x770x435	
	Weight (Net/ Gross)	Kg	33/35.5	50/53	
	Connection	Liquid mm, in	6.35 (1/4)	9.52 (3/8)	
	Pipe Size	Gas mm, in	12.7 (1/2)	15.88 (5/8)	
	Stuffing Quantity (40'HQ)	Set	175	125	

Note:

- The Above design and specification are subject to change without prior notice.
- Cooling conditions; T1: Indoor air temp. 27°C DB/19°C WB, Outdoor air temp. 35°C Db.
T3: Indoor air temp. 27°C DB/19°C WB, Outdoor air temp. 46°C Db.